

## Hex Nipple

### Product Description

#### Product Standard

As per IS:1239 (PART2): 1992 Screwed BSP Ends.

The carbon steel used in drop forged steel pipe fittings contains sulphur and phosphorus not exceeding 0.06% each.


#### End Connections

Screwed Female Ends conform to BSP as per BS21 / IS:554.

Other types of threads i.e. NPT can be given on request.

#### Test Pressure

IS:1239 (PART2) 1992-Pipe Fittings are tested to 1000 psig. (Hyd.)

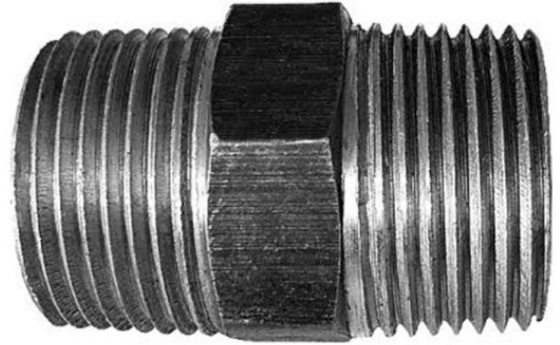

### Dimensions (in mm)

Nominal Bore	Minimum Length of Thread for Basic Gurge Length + Dia Clearance (L)	Thickness of Hexagon (T)	Minimum Overall Length (A)	Minimum Diameter of Bore (C)	Width Across Flat of Hexagon (B)
8	12.5	6	31	6.5	15.5
10	12.5	8	33	9.5	17.9
15	17.5	8	43	12.5	23
20	19	10	48	19	27.8
25	21	10	52	25	35.3
32	24	11	59	32	47.2
40	24	13	61	38	52
50	27	14	68	51	61.1

