

WM6 Single Jet Dry Type Water Meter

Features

- Dry register and register with 5 or 8 numbered roller.
- Brass body can be painted or nickel coated.
- High accuracy.
- Measuring unit is m³
- The meters conform to ISO4064 Standard Class B.

Working Conditions

- Water temperature ≤ 30°C; hot water meter ≤ 90°C
- Water pressure ≤ 1MPa (PN:1.6MPa/16bar)
- ΔP < 0.1MPa

Accuracy

- From minimum flow-rate (Q_{min}) inclusive, to transitional flow-rate (Q_t), exclusive: ±5%
- From transitional flow-rate (Q_t) inclusive, to overload flow-rate (Q_s), exclusive: ±2%
(Hot water meter: ±3%)




Dimensions (in mm)


Size	Length L	Width W	Height H	Connecting Thread D
15	110	78	65	G 1/4" B

Technical Data

Nominal Size DN (mm)	Class of measurement	Overload flow-rate Q _s (m ³ /h)	Permanent flow-rate Q _p (m ³ /h)	Transitional flow-rate Q _t (l/h)	Minimum flow-rate Q _{min} (l/h)
15	B	3	1.5	120	30



Head Loss Curve

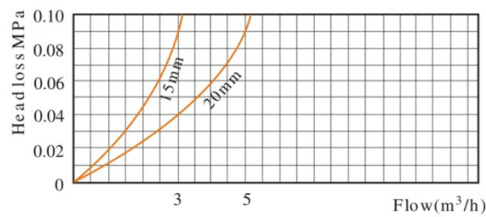

Error Curve

