

IS-5A Gun Metal Gate Valve Rising Stem, Screwed, IS : 778 Class-2 (ISI Marked)

Product Description

HSN 84818030

Product : 'SANT' Gun Metal Gate Valve
 Product Standard : IS-778
 Pressure/Class/Rating : Class-2
 Body Material cum Standard : GM (IS:318 Gr.LTB2)
 Description : Screwed in Bonnet, Inside Screw, Rising Stem
 Type of Seat : Integral seat
 Type of Wedge : Solid wedge
 Trim : Cu-Alloy
 Gland Packing : PTFE
 End Details : Screwed female threads to IS:554 Parallel


Testing & Certification

Body Test Pressure : 2.4 MPa Hyd.
 Seat & Back Seat Test Pressure : 1.6 MPa Hyd.
 Max Working Temperature: 45°C

Our Works' Test Certificate is furnished with every supply.

Application

Water	Oil
-------	-----

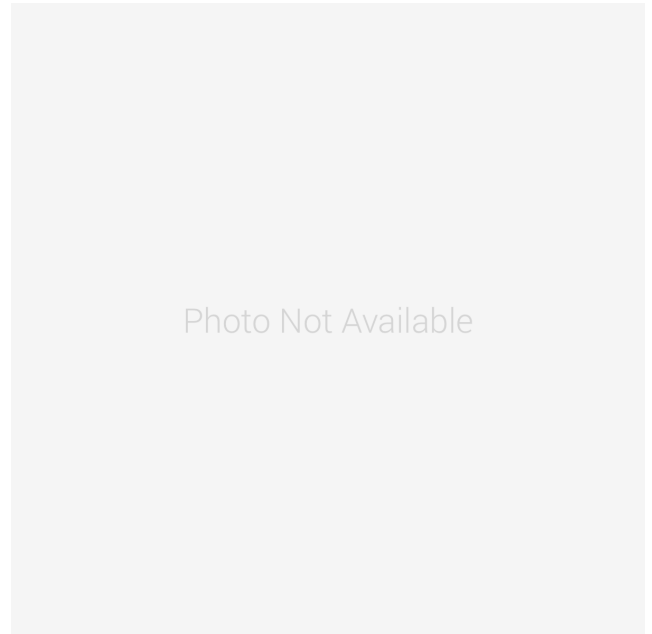


Materials of Construction

Components	Materials	Specifications
Body, Bonnet, Wedge, Stuffing Box, Gland & Gland Nut	Gun Metal / Leaded Tin Bronze	IS:318 Gr.LTB2
Stem	Forged Brass	IS:6912 Gr.FLB
Handwheel	Cast Iron / Steel	IS:210 Gr.FG200
Gland Packing	PTFE	---
Screw & Washer for Handwheel	Mild Steel	---

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F	H (Approx.)	ØW (Approx.)
15	1/2	60±1.5	130	60
20	3/4	60±1.5	145	60
25	1	70±1.5	165	65
32	1.1/4	80±1.5	180	85
40	1.1/2	90±1.5	210	90
50	2	100±1.5	250	90
65	2.1/2	105±1.5	300	105
80	3	125±1.5	380	120
100	4	160±1.5	480	145

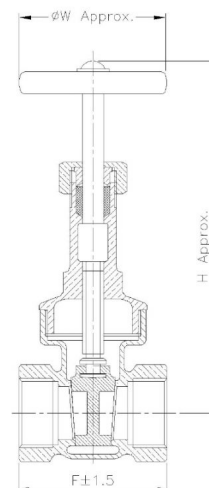

Notes

- Product images are for illustration purposes only. Actual product may vary.
- Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.