

XD381X Grooved Butterfly Valve with Tamper Switch UL/FM/VdS Approved

Product Description

Product Certification

UL Listed / FM Approved / VdS Approved

Design Standard

BS EN 593

Connection Ends

Groove to ISO 6182

Top Flange Standard

ISO 5211

Stem drive by keys, parallel or diagonal square or flat head

Working Pressure

PN16

Temperature Range

0°C - 100°C

Coating

Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550 or painting upon request




Materials of Construction

Part No.	Part	Standard Specification
1	Body	EN-GJS-450-10
2	O-Ring	NBR
3	Stub Shaft	SS431
4	Disc	EN-GJS-450-10+EPDM
5	Drive Shaft	SS431
6	Hex Nut	Carbon Steel Zinc plated
7	Signal Gearbox	Body:EN-GJS-450-10
8	O-Ring	NBR

Dimensions (in mm)

Inch	mm	A+B+L	C	F	G	H	W
2"	50	276.5	81	60.3	57.15	202.2	125
2.5"	65	295.5	97	76.1	72.26	202.2	125
3"	80	312.5	97	88.9	84.94	202.2	125
4"	100	345.5	116	114.3	110.08	202.2	125
5"	125	374.5	148	139.7	135.48	202.2	125
6"	150	408.5	148	165.1	160.9	215	225
8"	200	470.5	133	219.1	214.4	274	225
10"	250	534.5	159	273.1	268.28	274	225
12"	300	612	165	323.9	318.29	293.5	225

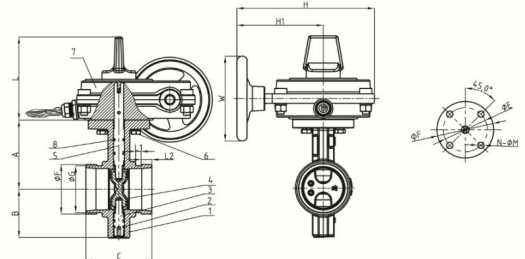

Notes

1. Product images are for illustration purposes only. Actual product may vary.

2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.