

## D81X4, D381X4 Grooved Butterfly Valve PN16

### Product Description

#### Design Standard

BS EN 593

#### Connection Ends

Groove to ISO 6182

#### Top Flange Standard

ISO 5211

Stem drive by keys, parallel or diagonal square or flat head

#### Working Pressure

PN16

#### Temperature Range

0°C - 100°C

#### Coating

Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550 or painting upon request




### Materials of Construction

Part No.	Part	Standard Specification
1	Valve Body	EN-GJS-450-10
2	Disc	EN-GJS-450-10+EPDM
3	O-Ring	NBR
4	Stem	Stainless Steel
5	O-Ring	NBR
6	Stem	Stainless Steel
7	Lever	EN-GJS-450-10
8	Signal Gearbox	EN-GJS-450-10

### Dimensions (in mm)

Inch	mm	A+B+L	C	ØF	ØG	ØK
2"	50	186	81	60.3	57.15	90
2.5"	65	205	97	76.1	72.26	90
3"	80	222	97	88.9	84.94	90
4"	100	255	116	114.3	110.08	90
5"	125	284	148	139.7	135.48	90
6"	150	318	148	165.1	160.9	90
8"	200	393	133	219.1	214.4	125
10"	250	457	159	273	268.28	125
12"	300	525	165	323.9	318.29	125
14"	377	576	178	377	371.4	150

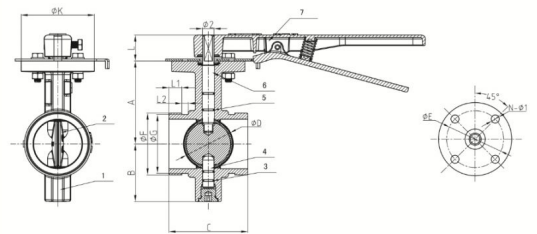

### Notes

- Product images are for illustration purposes only. Actual product may vary.
- Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.