

IBR-22 Bronze Pressure Relief Valve Screwed, Angle Type Enclosed Discharge

Product Description

HSN 84814000

Product : 'SANT' Bronze Relief Valve
Type of Pattern : Right AngleType
Body Material cum Standard : GM (IS:318 Gr.LTB2)
Description : Spring Loaded Enclosed Discharge
Type of Seat : Integral seat
Type of Disc : Renewable disc
Trim : Cu-Alloy
End Details : Inlet end male BSP Parallel threads outlet female BSP Parallel threads to BS 21.

Testing & Certification

Hydraulic Test Pressure : 300 Psig.Hyd.
Note : Please advise set pressure while placing order
Working Pressure : Max.150 Psig.

Our Work's Test Certificate is furnished with every supply.

Application

Water	Air
-------	-----




Materials of Construction

Components	Materials	Specifications
Body, Spring Chamber, Valve Disc, Spring Discs, Spindle, Check Nut & Adjusting Screw	Leaded Tin Bronze	IS:318 Gr.LTB2
Spring	Spring Steel	—

Dimensions (in mm)

Nominal Size	Size (Inches)	A (Inches)	B (Inches)	H (Approx.)	C	D
8	1/4	1/4"	1/4"	160	35	61
10	3/8	3/8"	3/8"	160	35	61
15	1/2	1/2"	1/2"	160	35	61
20	3/4	3/4"	3/4"	170	40	73
25	1	1"	1"	175	46	84
32	1.1/4	1.1/4"	1.1/4"	215	54	85
40	1.1/2	1.1/2"	1.1/2"	240	60	95
50	2	2"	2"	265	72	103
		BSP	BSP			

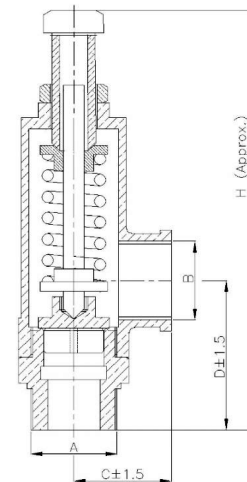

Notes

- Product images are for illustration purposes only. Actual product may vary.
- Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.