


Cabinet Fans

Direct Drive

- Constructional Fans**
1. Powder Coated GI Cabinet
 2. DIDW fans with scroll
 3. Multi-speed motors
 4. Access panel
 5. Optional filter at inlet
 6. Optional acoustic insulation

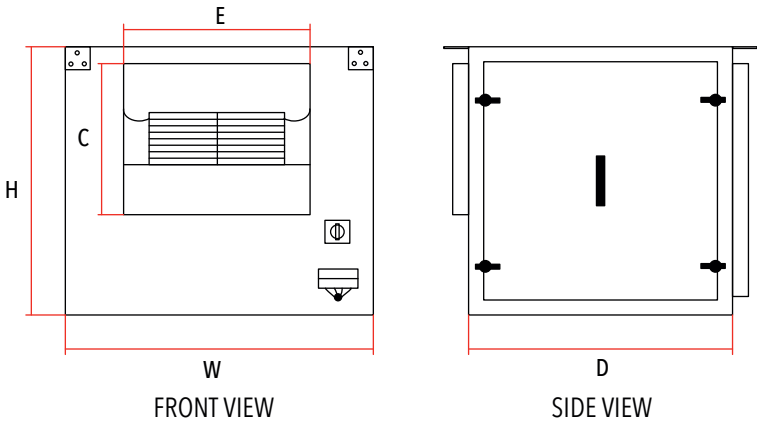

DIMENSIONS







MODEL	W	H	D	C	E
SCF 9/7 S	500	550	500	262	232
SCF 9/9 S	550	550	500	262	298
SCF 10/10 S	600	580	500	289	331
SCF 12/12 S	650	650	650	341	395
SCF 10/10 T	1050	600	500	331	590
SCF 12/12 T	1300	650	650	395	692

All dimensions are in mm. Subject to change for design improvement.
S : Single Blower and T : Twin blower models.

TECHNICAL DATA

MODEL	POWER	VOLTAGE	FREQUENCY	CURRENT	POLES
SCF 9/7 S	250 W	230 V	50 Hz	2.0 A	4
SCF 9/9 S	370 W	230 V	50 Hz	3.4 A	4
SCF 10/10 S	560 W	230 V	50 Hz	3.3 A	4
SCF 12/12 S	750 W	230 V	50 Hz	7.6 A	6
SCF 10/10 T	560 W X 2	230 V	50 Hz	3.3 A X 2	4
SCF 12/12 T	750 W X 2	230 V	50 Hz	7.6 A X 2	6

FAN PERFORMANCE CURVES

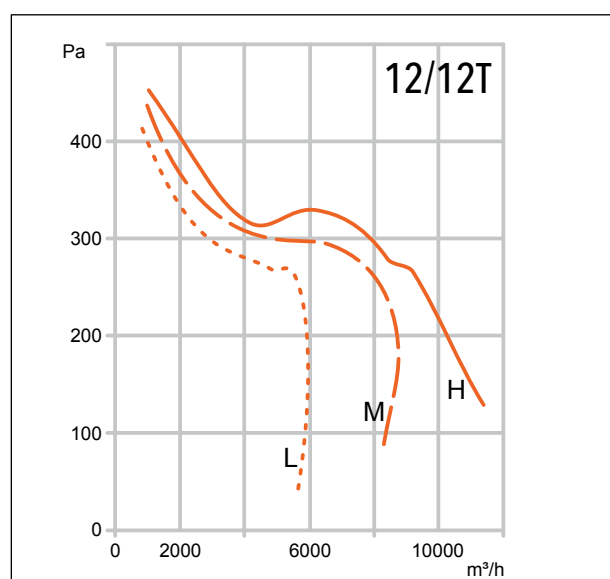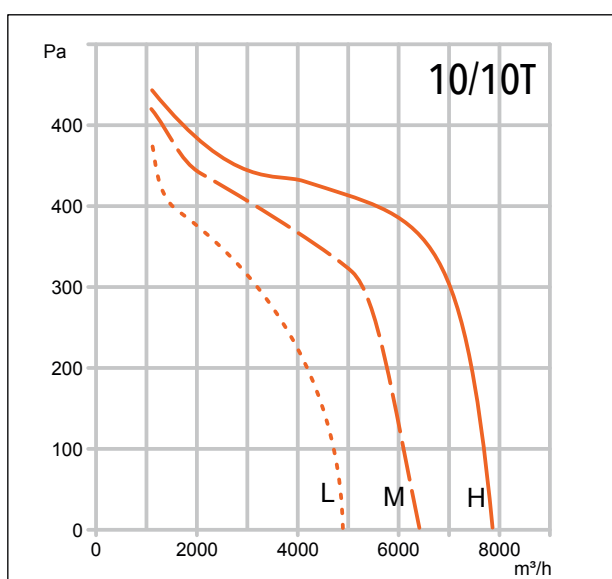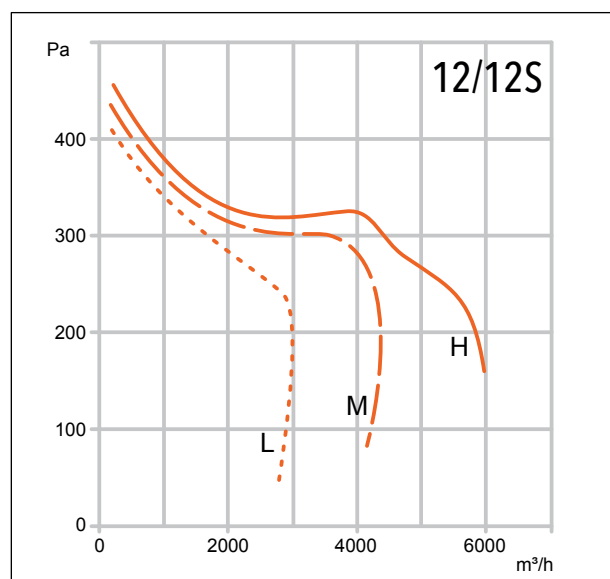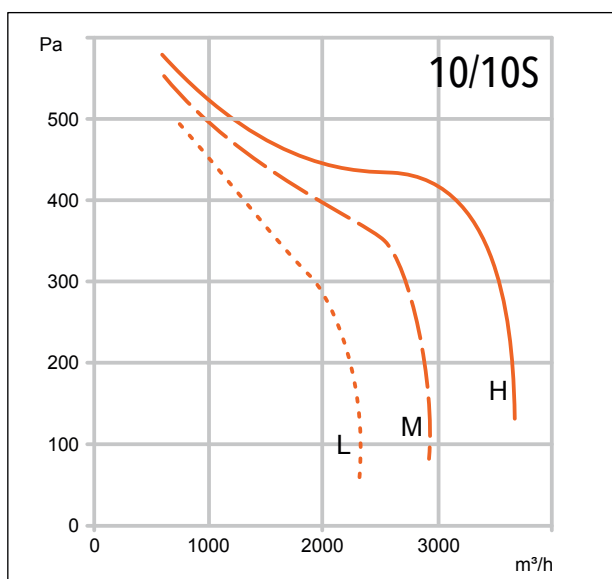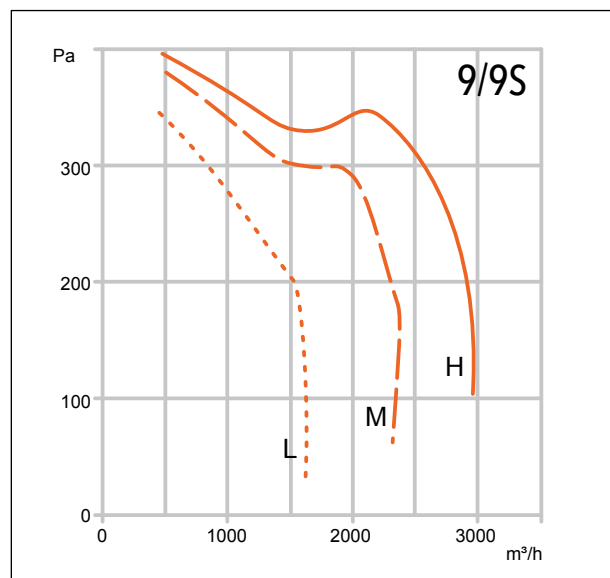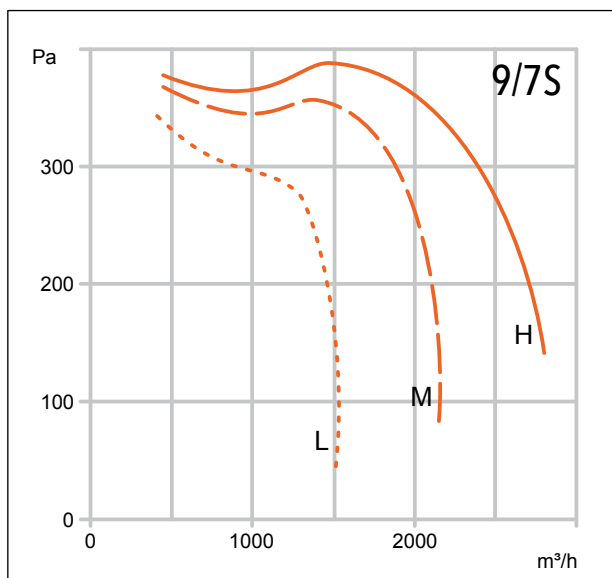

SANT AIR SYSTEMS
Complete HVAC Solutions