

## IBR-12B Bronze Y-Type Strainer Flanged (IBR Approved)

### Product Description

HSN 84818030

Product : 'SANT' Bronze Y-Type Strainer

Type of Pattern : Y Type

Body Material cum Standard : Bronze IBR 282(a)(iv) Gr.B

Description : Y-Type Screwed in cover, SS 304 Screen having 0.5mm Dia perforations

End Details : Flanges as per BS 10 Table H F.F. undrilled

### Testing & Certification

Hydraulic Test Pressure : 500 Psig.Hyd.

Working Pressure : Max.BOP 250 Psig.(17.58Kg/cm<sup>2</sup>)

Maximum Working Temperature : 435°F (225°C)

Test Certificate in Form III-C as per IBR is furnished with every supply.

### Application

Water	Oil	Gas	Steam
-------	-----	-----	-------




### Materials of Construction

Components	Materials	Specifications
Body, Bonnet	Bronze	IBR 282(a)(iv) Gr.B
Gasket	Compressed Asbestos Fiber	IS:2712 Gr.C
Strainer	Stainless Steel	AISI304

### Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F
15	1/2	114
20	3/4	140
25	1	162
32	1.1/4	178
40	1.1/2	203
50	2	203

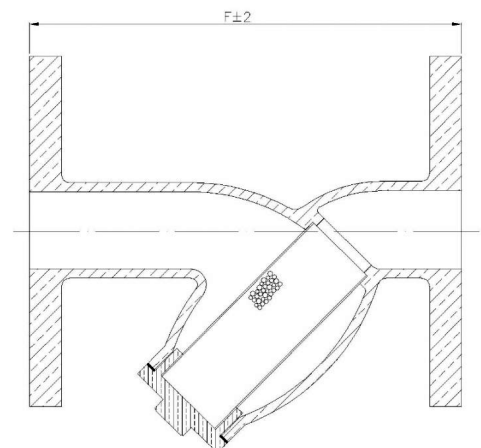

### Notes

- Product images are for illustration purposes only. Actual product may vary.
- Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.