

## XD371X Wafer Butterfly Valve with Tamper Switch PN16, UL/FM/VdS Approved

### Product Description

#### Product Certification

UL Listed / FM Approved /VdS Approved (EX 29405)

#### Design Standard

BS EN 593

#### Top Flange Standard

ISO 5211

#### Working Pressure

PN16

#### Temperature Range

0°C - 100°C

#### Coating

Fusion Bonded Epoxy Coating in accordance with ANSI/AWWA C550

#### Flange Specification

BS EN 1092-2 PN10/PN16, ASME B16.1 CL 125, ASME B16.5 CL 150, JIS B2210 10K




### Materials of Construction

Part No.	Part	Standard Specification
1	Body	EN-GJS-450-10
2	O-Ring	NBR
3	Stub Shaft	SS431
4	Disc	EN-GJS-450-10+EPDM
5	Hex Nut	Carbon Steel Zinc plated
6	Signal Gearbox	Body:EN-GJS-450-10
7	Drive Shaft	SS431
8	O-Ring	NBR
9	End Face Seal	EPDM

### Dimensions (in mm)

Inch	mm	A+B+L	C	H	W
2"	50	328	43	202.2	125
2.5"	65	346.5	46	202.2	125
3"	80	361	46	202.2	125
4"	100	393.5	52	202.2	125
5"	125	424.5	56	202.2	125
6"	150	458	56	215	225
8"	200	530	60	274	225
10"	250	591.5	68	274	225
12"	300	669	78	293.5	225

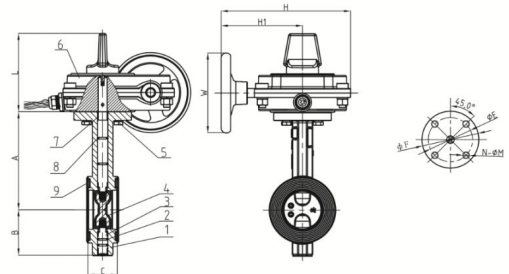

#### Notes

1. Product images are for illustration purposes only. Actual product may vary.

2. Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.