

IBR-15 Bronze Sight Glass Screwed (IBR Approved)

Product Description

HSN 84818030

Product : 'SANT' Bronze Sight Glass

Body Material cum Standard : Bronze IBR 282(a)(iv) Gr.B

Description : With toughened glass single window upto & including 25mm size & double window for size above 25mm

End Details : Screwed male BSP Taper threads to BS 21.

Testing & Certification

Hydraulic Test Pressure : 500 Psig.Hyd.

Working Pressure : Max.BOP 250 Psig.(17.58Kg/cm²)

Maximum Working Temperature : 435°F (225°C)

Test Certificate in Form III-C as per IBR is furnished with every supply.

Application

Water	Oil	Steam
-------	-----	-------




Materials of Construction

Components	Materials	Specifications
Body & Ring	Bronze	IBR 282(a)(iv) Gr.B
Glass	Toughened Glass	—
Gasket	Compressed Asbestos Fibre	—

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	F	H
15	1/2	89	43
20	3/4	92	48
25	1	102	50
32	1.1/4	105	98
40	1.1/2	110	110
50	2	115	122

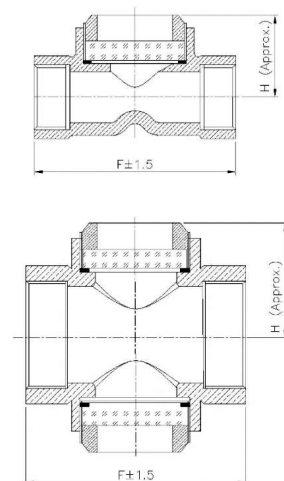

Notes

- Product images are for illustration purposes only. Actual product may vary.
- Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.