

IBR-21 Bronze Pressure Relief Valve Screwed, Open Discharge

Product Description

HSN 84814000

Product : 'SANT' Bronze Relief Valve

Type of Pattern : Straight Type

Body Material cum Standard : GM (IS:318 Gr.LTB2)

Description : Spring Loaded Open Discharge

Type of Seat : Integral seat

Type of Disc : Renewable disc

Trim : Cu-Alloy

End Details : Screwed male BSP Parallel threads to BS 21.

Testing & Certification

Hydraulic Test Pressure : 300 Psig.Hyd.

Note : Please advise set pressure while placing order

Working Pressure : Max.150 Psig.

Our Work's Test Certificate is furnished with every supply.

Application

Water	Air
-------	-----




Materials of Construction

Components	Materials	Specifications
Body, Spring Chamber, Valve Disc, Spring Discs, Spindle, Check Nut & Adjusting Screw	Leaded Tin Bronze	IS:318 Gr.LTB2
Spring	Spring Steel	—

Dimensions (in mm)

Nominal Size	Nominal Size (Inches)	A (Inches)	H (Approx.)
8	1/4	1/4	160
10	3/8	3/8	160
15	1/2	1/2	160
20	3/4	3/4	170
25	1	1	175
32	1.1/4	1.1/4	215
40	1.1/2	1.1/2	240
50	2	2	265
		BSP	

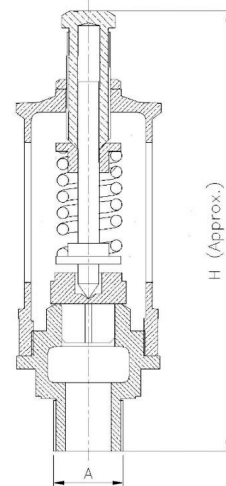

Notes

- Product images are for illustration purposes only. Actual product may vary.
- Actual dimensions may change over time, due to continual design improvements. Please confirm before placing order.